

# PS Series

## EXTERNAL VIEW



INTERACTOR.COM  
(203) 630-0199

HANDLE ASSEMBLY  
PN: 5010


COVER  
PN: 5080CV

CHASSIS  
PN: 5080CH

DC CORD  
SEE ACCESSORIES

STRAIN RELIEF  
PN: 1230

THERMISTOR ASSEMBLY  
PN: 5020

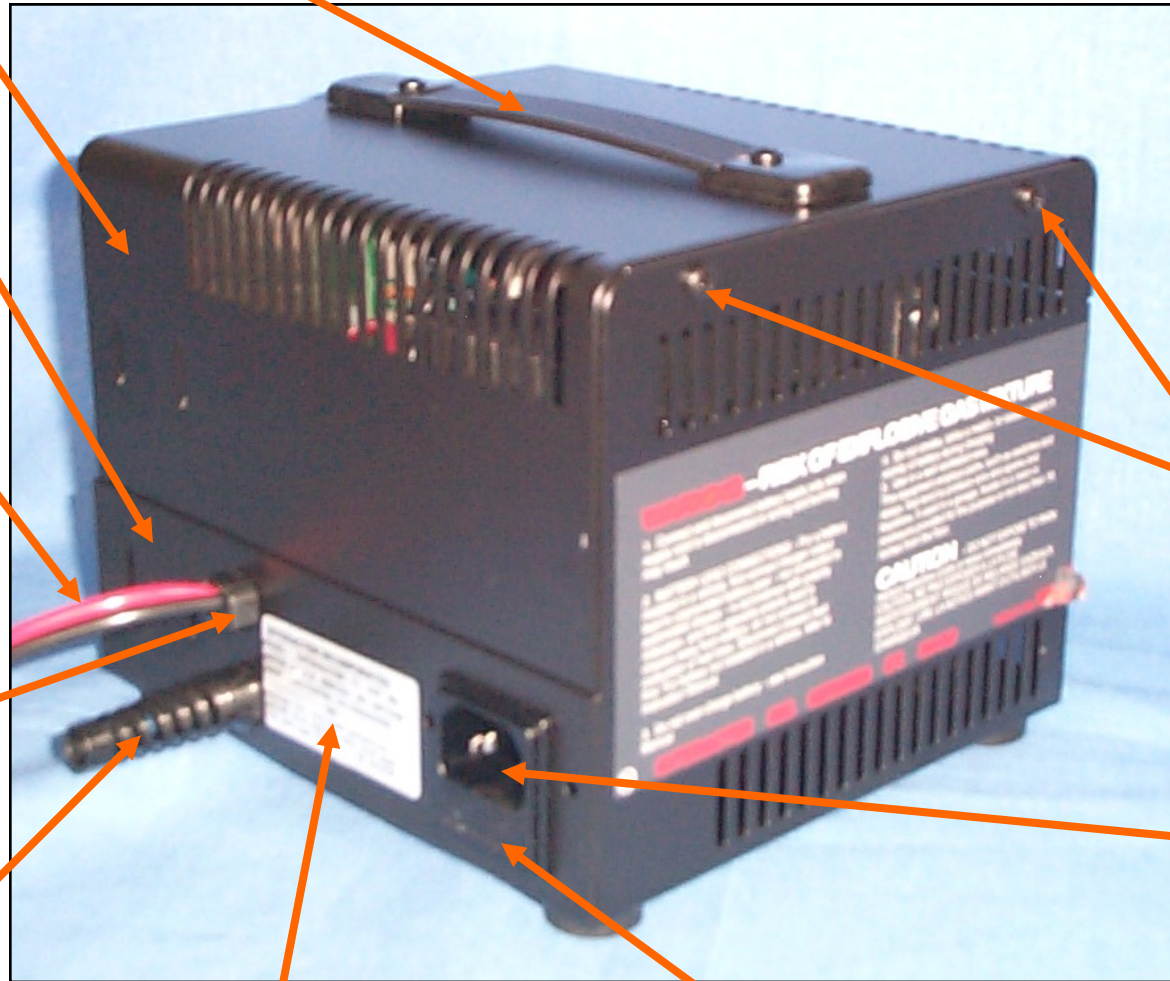

SCREWS  
PN: 4590

IEC ASSEMBLY  
PN: 5040

LABEL  
MODEL & SERIAL NUMBERS  
STANDARD OR DUAL VOLTAGE  
NOTE: SEE PAGE 2.

FUSE DRAWER  
NOTE: SEE PAGE 2

# PS Series



INTERACTER.COM  
(203) 630-0199


## REAR VIEW (OPEN)

TRANSFORMERS	
NOTE: TRANSFORMERS WILL VARY BY MODEL .	
Model	PN
PS1205	5100
PS1205-Dual	5100E (Dual)
PS1210	5050
PS1210-Dual	5050E (Dual)
PS2405	5110
PS2405-Dual	5110E (Dual)
PS2408	5090
PS2408-Dual	5090E (Dual)

PCB ASSEMBLY  
PN: 5300

CHASSIS  
PN: 5080CH

IEC ASSEMBLY  
PN: 5040

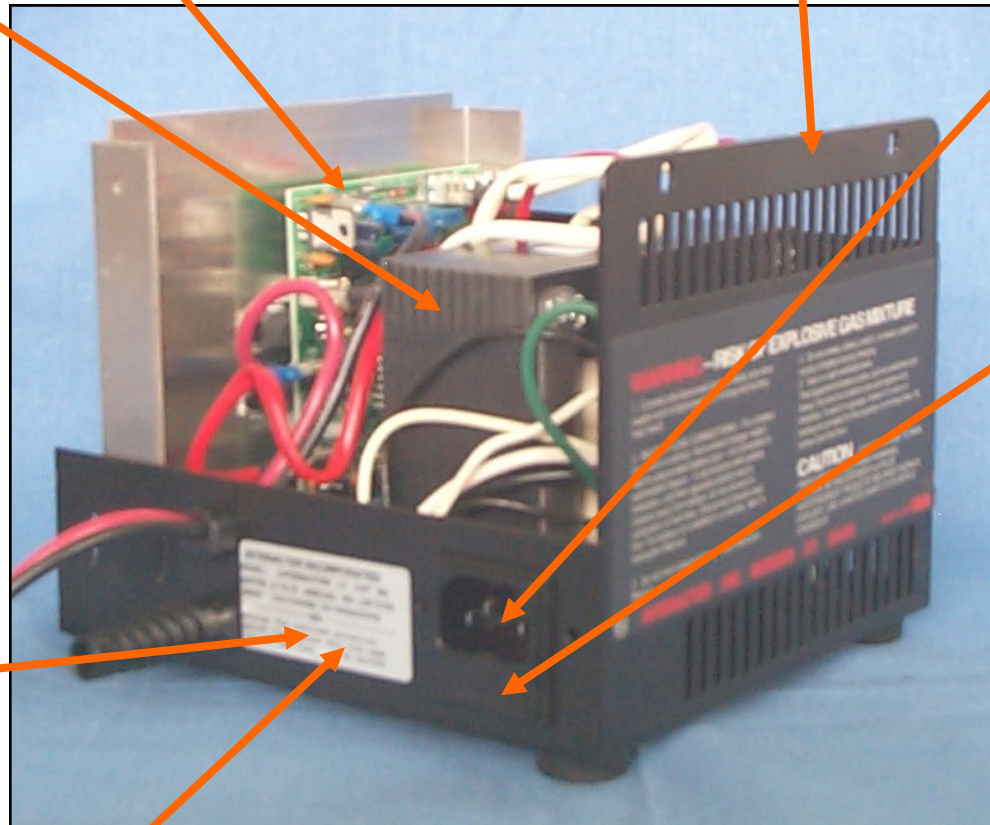

**FUSES**  
**ALL FUSES ARE SLOW BLOW !**  
NOTE: FUSE WILL VARY BY MODEL.  
SEE ACCESORIES.

Model	AMPS	PN
PS1205	2	4270
PS1205-Dual	2	4270
PS1210	4	1180
PS1210-Dual	4	1180
PS2405	4	1180
PS2405-Dual	4	1180
PS2408	6.3	2970
PS2408-Dual	6.3	2970

Example of a **STANDARD** charger.

**INTERACTER INCORPORATED**  
MODEL: INTERACTER II 24V 8A  
BATCH: # / # / # SERIAL NO: #####  
**INPUT: 117 VOLTS** A.C. 60Hz, 320VA  
\*\*\*\*\* NB \*\*\*\*\*  
290 PRATT ST.  
MERIDEN, CT. 06450  
MADE IN THE U.S.A.

Example of a **DUAL** voltage charger.


**INTERACTER INCORPORATED**  
MODEL: INTERACTER II 24V 8A  
BATCH: # / # / # SERIAL NO: #####  
**INPUT: 115/230 VOLTS** A.C. 60Hz, 320VA  
\*\*\*\*\* NB \*\*\*\*\*  
290 PRATT ST.  
MERIDEN, CT. 06450  
MADE IN THE U.S.A.

# PS Series

## BOTTOM VIEW



INTERACTOR.COM  
(203) 630-0199

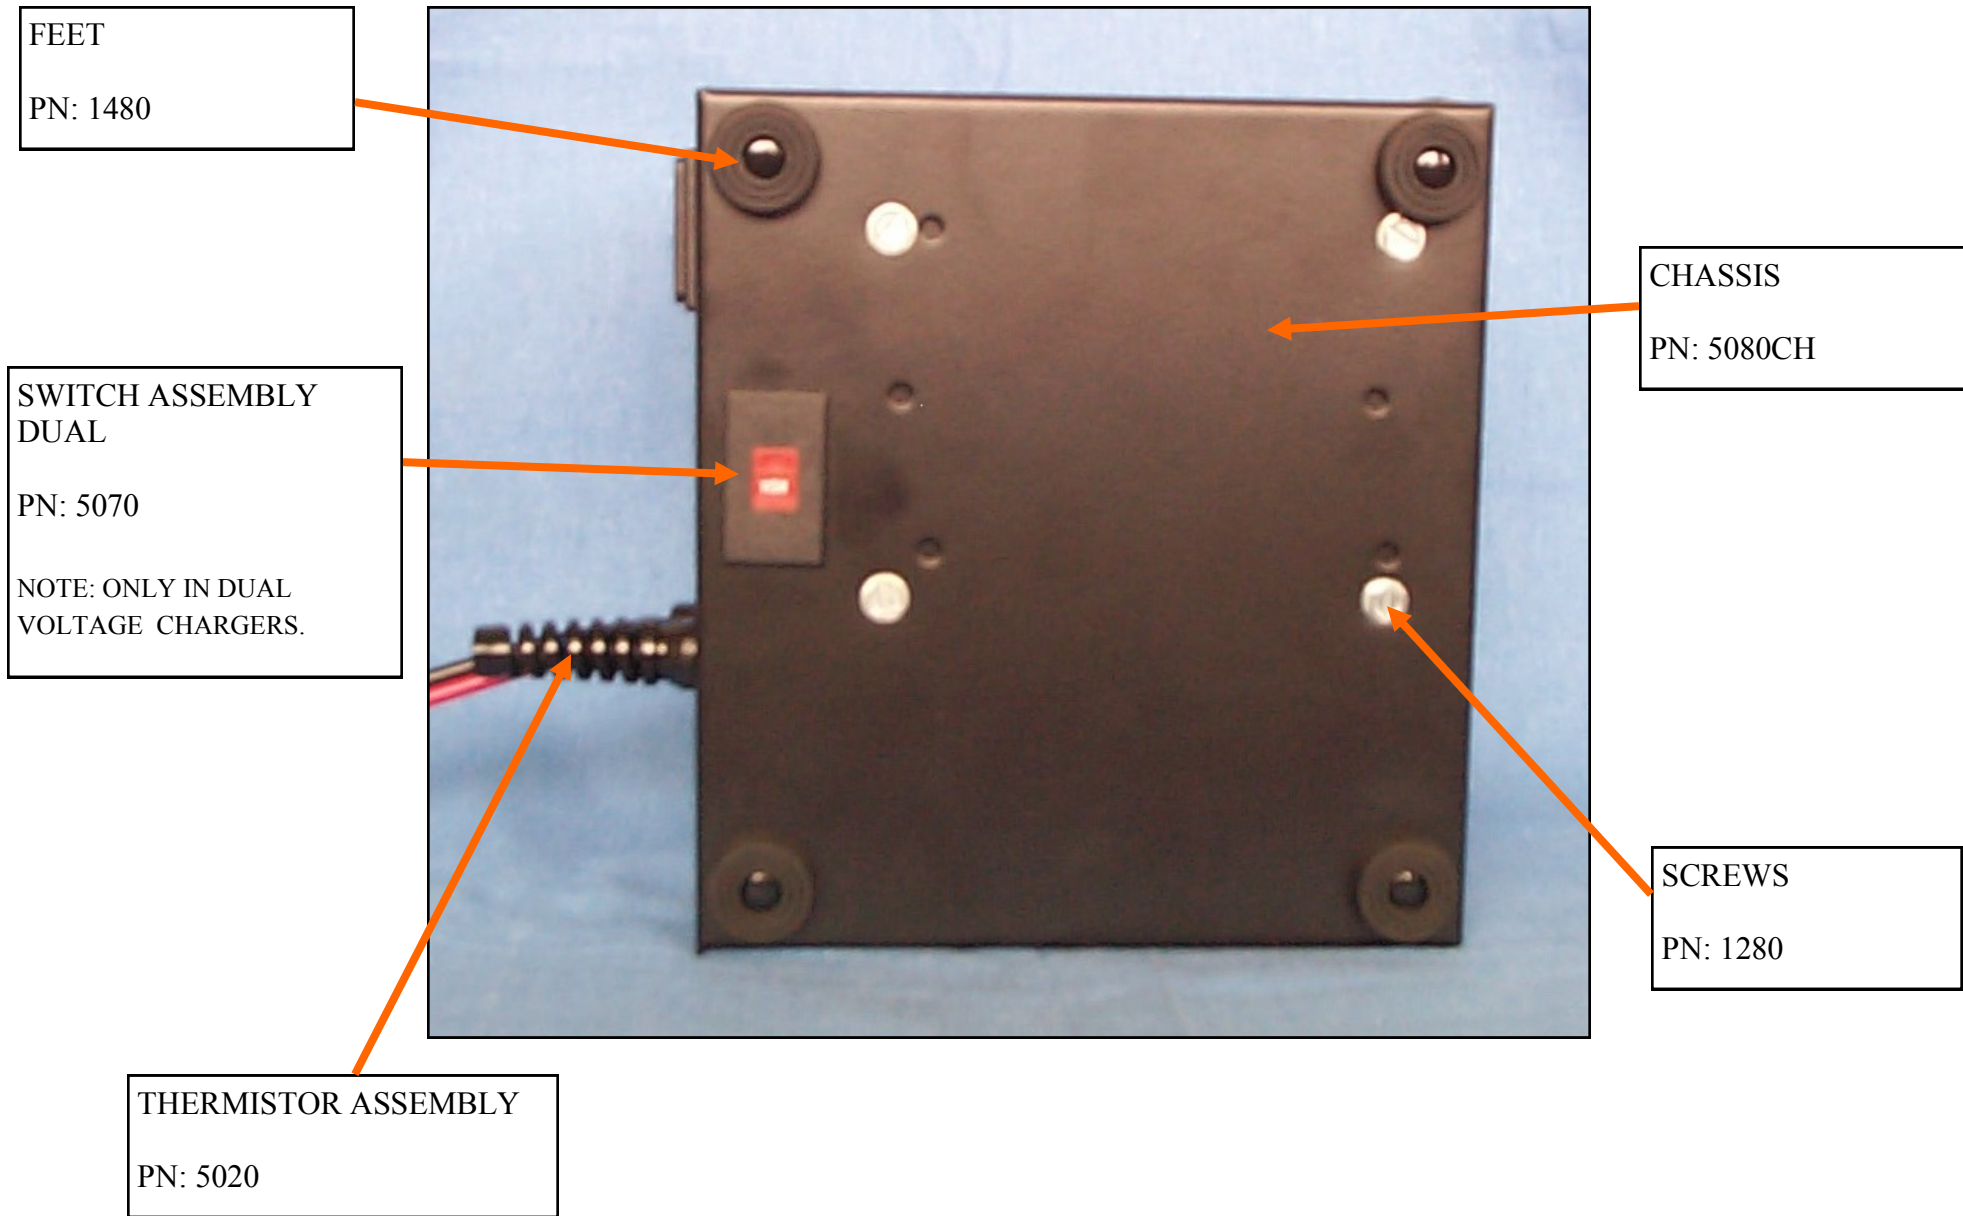

# PS Series

## PCB VIEW



INTERACTER.COM  
(203) 630-0199


PCB ASSEMBLY

PN: 5300


BATTERY TYPE  
SWITCH

PRESET AT FACTORY

**DO NOT ADJUST !**

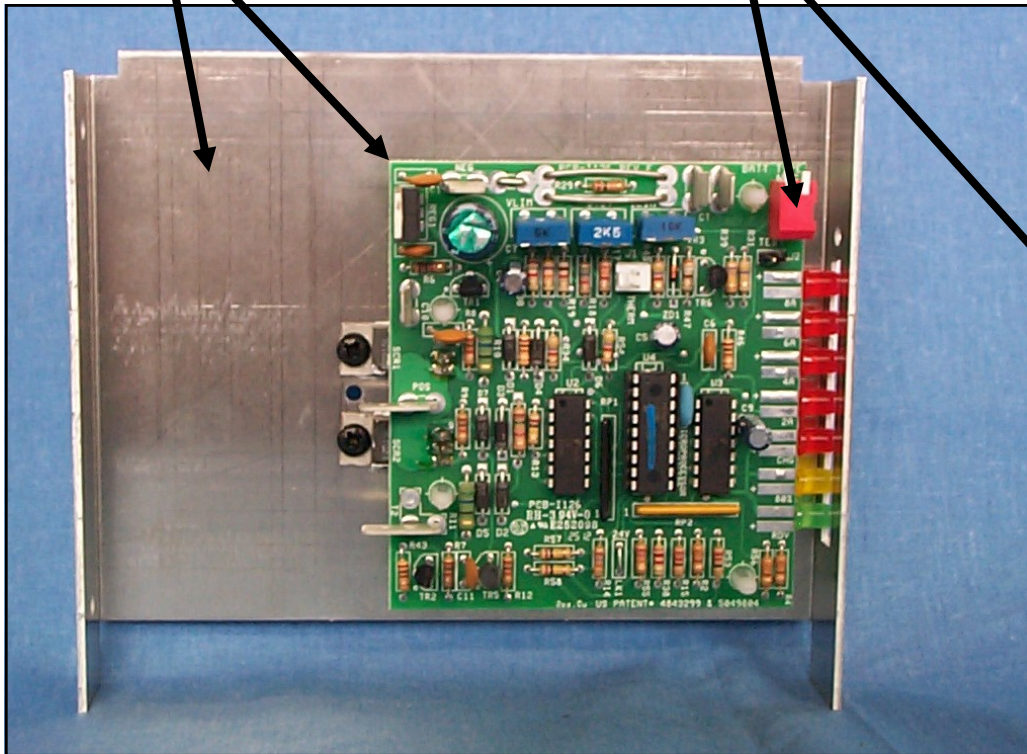

FRONT VIEW

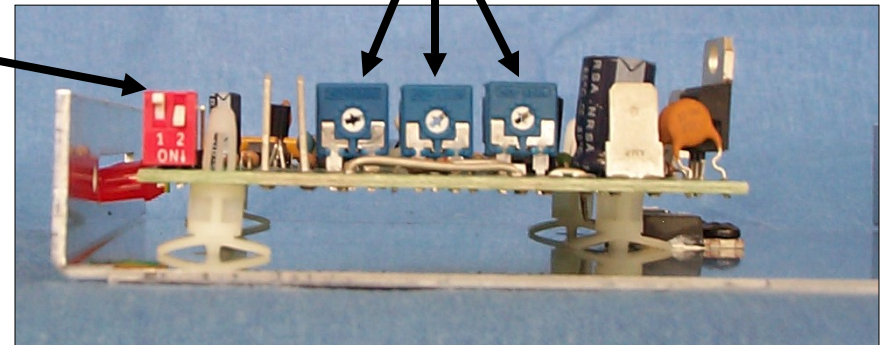

TOP VIEW

### BATTERY TYPE SWITCH SETTINGS

Mode	Battery Type	1	2
Normal	Sealed Lead Acid, AGM	Off	On
Gel Cell	Sealed Gel Cell	On	Off
Liquid Electrolyte	Vented Lead Acid	Off	Off

# PS Series



INTERACTER.COM  
(203) 630-0199

## ACCESSORIES & SPECS


### FUSES

**ALL FUSES ARE SLOW BLOW !**

NOTE: FUSE WILL VARY BY MODEL.

Model	AMPS	PN
PS1205	2	4270
PS1205-Dual	2	4270
PS1210	4	1180
PS1210-Dual	4	1180
PS2405	4	1180
PS2405-Dual	4	1180
PS2408	6.3	2970
PS2408-Dual	6.3	2970

FUSE RATINGS

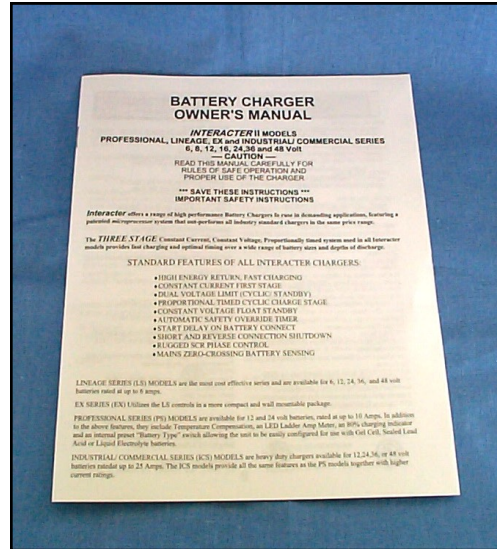

OWNERS MANUAL

PN: 1010



AC POWER CORD

PN: 1130