

8A8D LTP

SPECIFICATIONS

| | |
|--------------------------------|------------------------------|
| Nominal Voltage (V) | 12V |
| Capacity at C/100 | 250Ah |
| Capacity at C/20 | 245Ah |
| Capacity at C/5 | 197Ah |
| Weight | 163 lbs. (74 kg) |
| Plate Alloy | Lead Calcium |
| Posts | Forged Terminals & Bushings |
| Container/Cover | Polypropylene |
| Operating Temperature Range | -40°F (-40°C) - 140°F (60°C) |
| Charge Voltage @ 77°F (25°C) | |
| Charge / Absorption / Equalize | 2.30 - 2.43 VPC |
| Float / Standby | 2.23 - 2.26 VPC |
| Vent | Self-sealing |
| Terminal | T (T975) |



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology




DIMENSIONS

Inches (mm)

| | |
|--------|--|
| Length | 21.03 (534 mm) <i>Including handles</i> |
| Width | 11.00 (279 mm) |
| Height | 10.82 (275 mm) <i>including terminal</i> |

AGM Cycle Life vs. Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

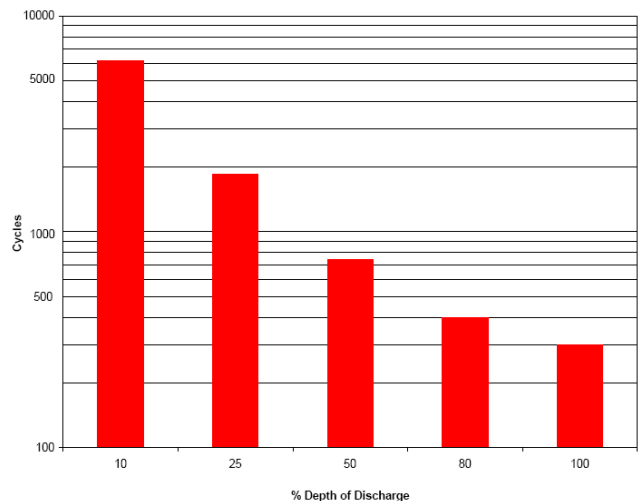

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

