




ST-50Q-12

High Efficiency Monocrystalline PV Module

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Designed to withstand high wind pressures, hail and heavy snow.
- Quality aesthetic appearance.

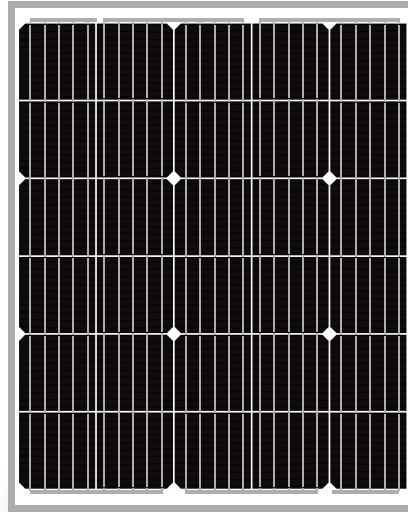

30 CELLS

MONOCRYSTALLINE MODULE

50W

POWER OUTPUT

21%

MODULE EFFICIENCY

3%

POSITIVE TOLERANCE



High Efficiency

Module efficiency improved through advanced cell technology and manufacturing capabilities



High PID Resistance


Advanced cell technology and qualified materials lead to high resistance to PID



Withstands Harsh Environment

High PID resistance, 5400 Pa positive load, 2400 Pa negative load, Salt mist (IEC 61701)

Performance Warranty

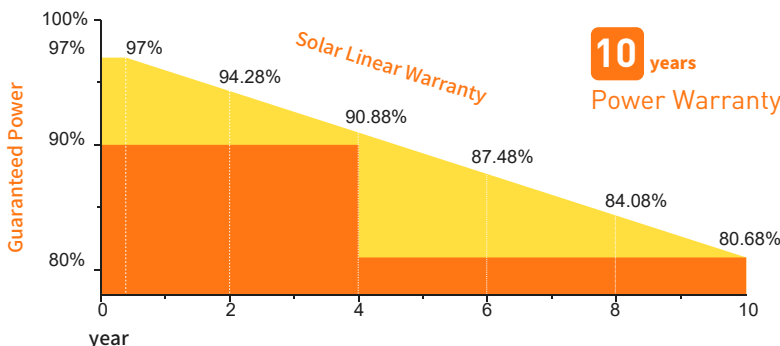

5 years

Product Warranty

10 years

Power Warranty

Wind Load/Snow Load:
2400pa/5400pa

Positive Power Tolerance:
0~3%


Warranty Information:
5 Years Product Workmanship

Electrical Characteristics

Maximum Power (P _{max})	50W
Voltage at P _{max} (V _{mp})	17.2V
Current at P _{max} (I _{mp})	2.91A
Open-circuit Voltage (V _{oc})	20.23V
Short-circuit Current (I _{sc})	3.09A
Temperature Coefficient of V _{oc}	-0.36%/K
Temperature Coefficient of I _{sc}	+0.07%/K
Temperature Coefficient of Power	-0.38%/K
NOCT (Air 20°C; Sun 0.8kW/m ² Wind 1m/s)	47±2°C
Operating Temperature	-40°C to 85°C
Maximum System Voltage	600V DC
Power Tolerance	± 3%

*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C




*NOCT: Nominal operating cell temperature (the data is only for reference)

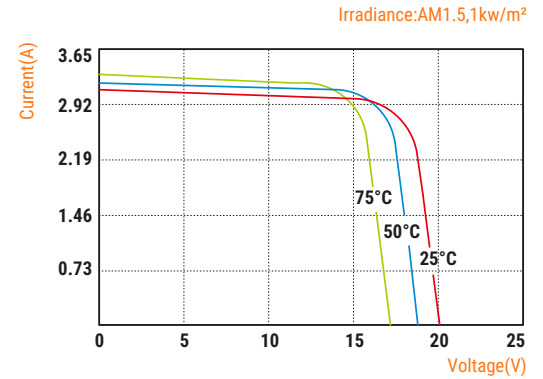


I-V Curves (STC)

Specifications

Cells	Monocrystalline silicon solar cell
No. of Cells and Connections	30(5X6)
Module Dimension	24.02in.x19.29in.x1.18in.[610mmx490mmx30mm]
Weight	7.81lbs[3.54kg]
Packing Information(Carton)	25.79in.x21.06in.x2.56in.[655mmx535mmx65mm]/(1pc/ctn)

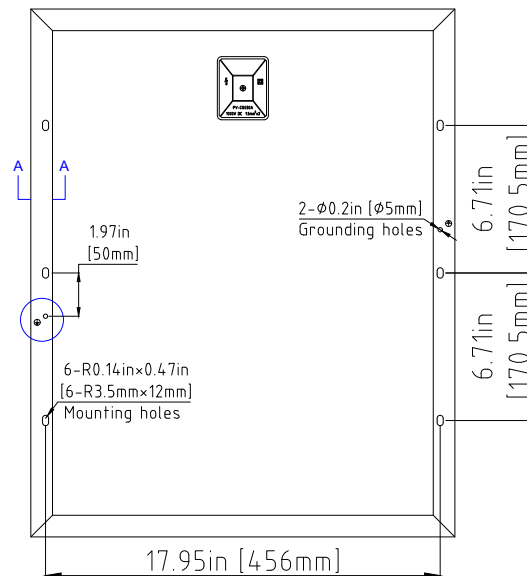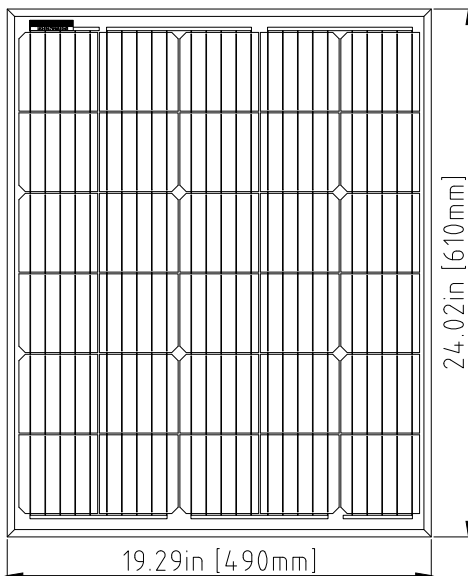

**Junction Box
Top View (Lid Open)**

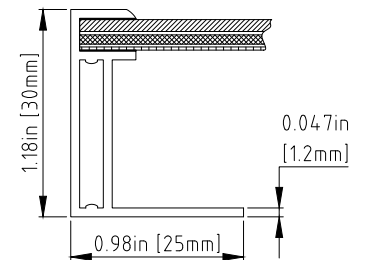

Section A-A