


NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00288 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWING ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM]
4. TERMINAL HARDWARE KIT PROVIDED, PART NUMBER 6923

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	CHANGED HANDLE DIRECTION	2/26/07	JBT
B	REV COVER, HANDLE, AND NOM WT, WAS 82 lbs, ADDED NOTE 4	11/6/07	JBT

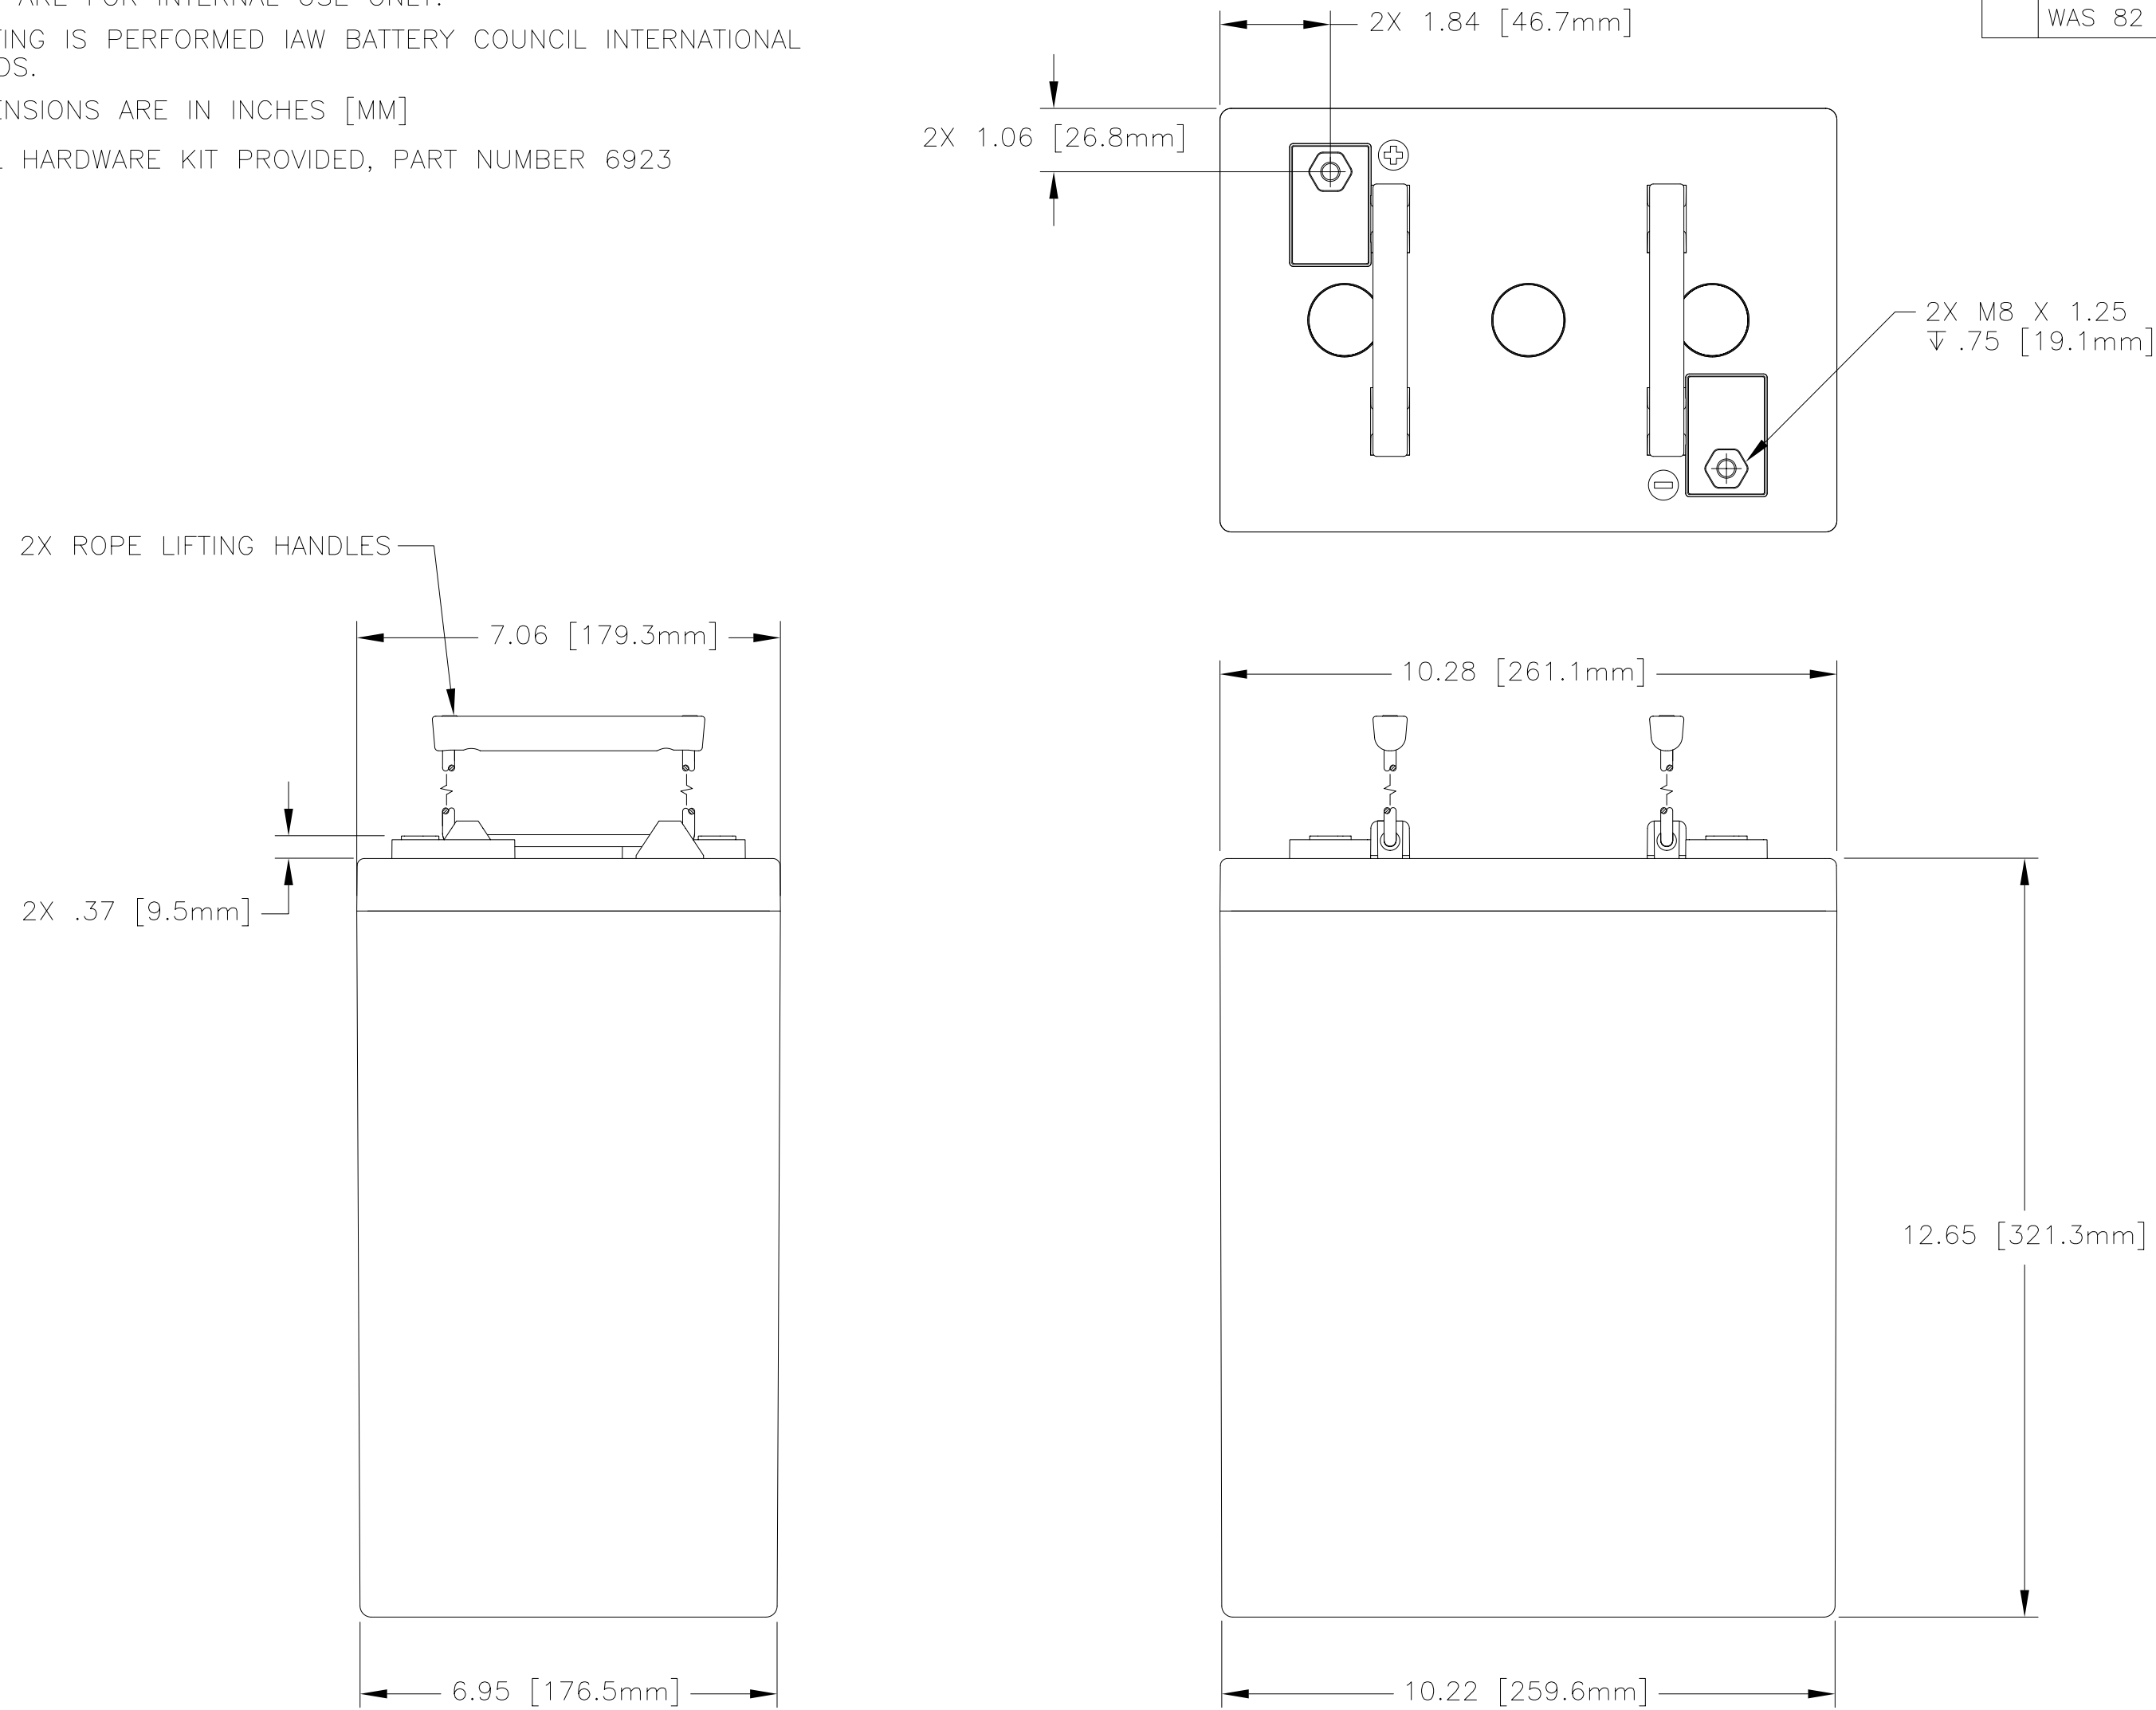

CAPACITY RATINGS	
PART NUMBER	GPL-6CT
NOMINAL WEIGHT	90 LBS [40.8 KG]
AMPERE HOUR CAPACITY @ 20 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	300 AH
MINUTES OF DISCHARGE @ 25 AMPS 1.75 VOLTS/CELL @ 77°F (25° C)	692 MIN

ENVELOPE DRAWING

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS    DECIMALS    ANGLES $\pm \pm 1/32$ .XX $\pm .12$ $\pm \pm 1^\circ$ .XXX $\pm .060$			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
APPROVALS		DATE		TITLE	
DRAWN	RM	8/28/06		BATTERY, 6 VOLT, GPL-6CT	
CHECKED		DATE		SIZE	CAGE CODE
AMIII		12/1/06		C	63017
APPROVED		DATE		DWG NO.	REV
JBT		12/7/06		GPL-6CT	B
ISSUED		DATE		SCALE	SHEET
NS		11/30/07		1=2.5	1 OF 1